Tobler®

MATO Pro Anti-fall protection systems



Swiss Engineering.
Swiss Technology.

- Minimized labour costs through faster assembly / disassembly
- Maximum safety / protection in accordance with EN 13374, Class C
- NF Certification no. R27.02
- Assembly / Disassembly without tools by just one person
- Perfect handling, highly versatile
- No damage to the façade
- Immediate delivery

MATO Pro **Anti-fall protection systems**

The perfect solution for roofers and solar installers.



Our product range:

- Integral console bracket
- Rafter clamp
- Parapet clamp
- Ridge protection
- Console bracket for ballasted guardrail
- Roof scaffolding console bracket
- Solar console bracket
- Safety railing
- Guardrail standard
- Scaffolding tube and couplings
- Anti-fall protection guardrails
- Toe boards
- Walkway protection panels
- Nets

MATO Pro **Anti-fall protection systems**

Simple. Effective. Unique.



Examples of roof access:

- MATO 2 Stair towers made of aluminium (see illustration)
- MATO 8 Stair towers made of aluminium (for users of an all-in-one system solution)
- MATO R Profi Mobile scaffolding made of aluminium
- MATO R Pro Mobile scaffolding made of aluminium
- MATO R Eco Mobile scaffolding made of aluminium

MATO Pro **Anti-fall protection systems**

Quick and safe with integral console bracket.

Integral console bracket

The Tobler integral console bracket is easy to handle, stable and flexible to use. Together with the special safety railings based on round tubes, it is the perfect choice for working safely and productively on sloped and flat roofs.

The integral console bracked simply hooks onto the gutter or the roof edge. The force is dispersed through special facade supports. For more information, see the detailed instructions for construction and use.

Article no.	Designation	Weight	Norms
Z-615200	integral console bracket 200 cm, aluminium, height adjustable 2.60–3.50 m	10.45 kg	NF

Labeling NF:


The **Integral Console Bracket MATO Pro** has been granted NF approval by AFNOR CERTIFICATION (No. R27.02).

The NF label for Equipements de chantiers certifies compliance with the NF EN 13374 standard and the NF 096 reference document. The list of certified products and their classification can be found at www.marque-nf.com.



Benefits

- Easy assembly / disassembly without tools by just one person
- Low weight due to aluminium design
- No anchoring required
- No damage to the façade from drill holes
- Easy to handle
- Reliable, mobile side protection system in accordance with EN 13374, Class C
- NF Certified – certification no. R27.02
- Can be used on the edge of flat roofs
- Can be used on the edge of roofs inclined up to 45°
- Flexible and adaptable
- Full-length railing braces, welded to the main frame
- Aluminium toe board
- Fair price / performance ratio

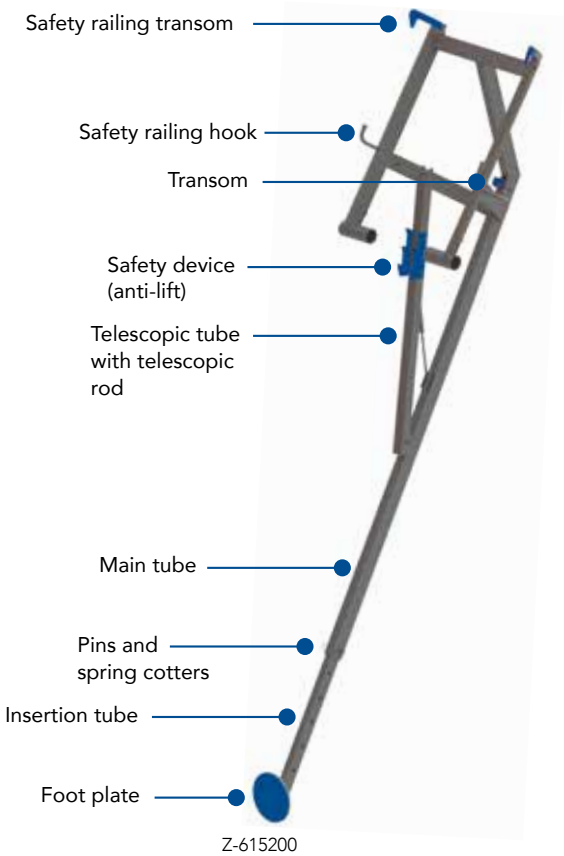

Z-615200

MATO Pro Anti-fall protection systems


Quick and safe with integral console bracket.

Super Safety

Safety railing for integral console bracket

- Full aluminium
- Available in sizes 200 cm and 300 cm
- 48.3 mm round tube for quick connections to the tubes for gable protection
- Couplings can be attached at any point
- Optional extension with 38 mm star pipe
- Suitable up to and including Class C
- Refer to assembly instructions


Article no.	Length	Height	Weight	Norms
Z-616200	200 cm	100 cm	11.3 kg	NF
Z-616300	300 cm	100 cm	16.45 kg	NF

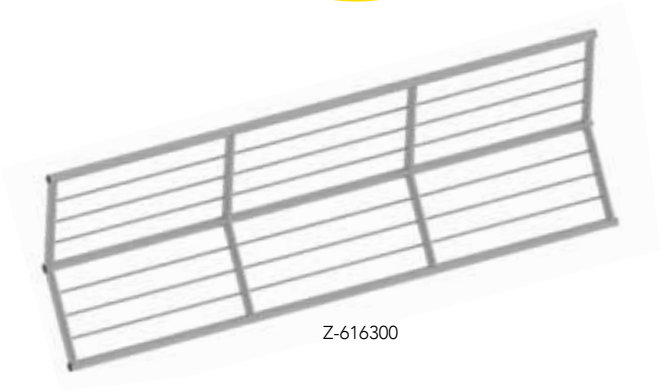

Z-616300

- Aluminium toe board for safety railing Z-616…
- Light and easy to install
- Reinforced aluminium brackets
- Powder-coating and labelling are possible starting from order volumes above 100 units (may include other system toe boards such as MATO 1, 2,...)

Article no.	Length	Weight	Norms
Z-617200	200 cm	3.4 kg	NF
Z-617300	300 cm	5.15 kg	NF

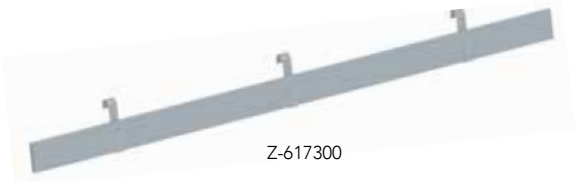

Z-617300

- Integral safety bracket for safety railing Z-616…
- Made of steel (6 mm)
- Height-adjustable bracket
- Angle-adjustable hinge
- Compatible with all roof inclines
- The safety bracket is mandatory for roof inclines from 30° to 45°.

Article no.	Length	Weight	Norms
Z-616010	75 cm	2.1 kg	NF



Z-616010



MATO Pro **Anti-fall protection systems**

Quick and safe with integral console brackets.

Universal

Assembling the integral console bracket

The Tobler integral console bracket and its safety railings are designed to provide appropriate fall protection on both flat and inclined roofs.


The product is suitable as temporary edge protection in the roof area, in accordance with the requirements of EN 13374, for roofs inclined up to 60°. It is used in work areas where roofs pitches are greater than 0° and up to 45°, if the fall height is exceeding 2 m.



Step 1: Hooking and securing

Version 1: Installation in the gutter

- The integral console bracket is inserted in the gutter.
- The anti-lift device is positioned underneath the bead fold or another kind of edge on the gutter.
- The instructions for construction and use must always be followed.

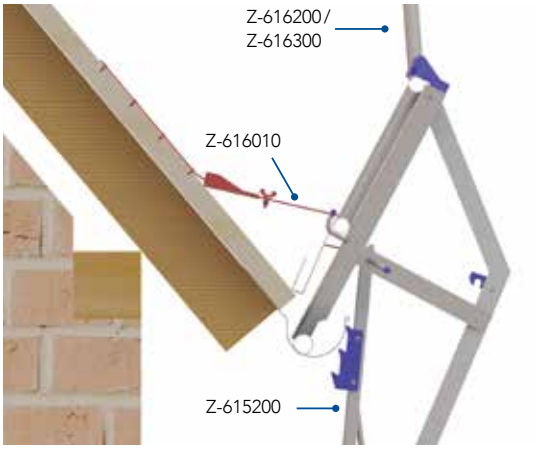

Version 2: Attachment to the roof edge

- The round tubes of the integral console bracket are positioned behind a roof edge that is at least 6 cm high.
- The anti-lift device is secured by attaching it underneath a copper roof edge strip or another type of edge formation.
- The instructions for construction and use must always be followed.



Step 2: Bracing the foot plate on the facade

- A load-supporting, firm and even facade is required for the bracing.
- The instructions for construction and use must always be followed.



MATO Pro Anti-fall protection systems

For fast and efficient logistics

Storage racks for transportation

Logistics always play a very important role. On construction sites and during transport, time and space mean money. Due to the ever-decreasing numbers of staff on sites, advantages in transport and logistics are becoming more and more important.
Tobler is your ideal partner for storage and logistics.



Storage rack with safety railing

Storage racks

- Made of steel
- Storage rack for 16 units of safety railings

Article no.	Length	Width	Weight
Z-616050	127 cm	64 cm	26 kg



Z-616050

- Storage rack for 11 integral console brackets (30 linear metres)

Article no.	Length	Width	Weight
Z-615050	260 cm	60 cm	45.8 kg



Z-615050



Sorage rack with integral console brackets



Example of transportation with trailer

MATO Pro **Anti-fall protection systems**

Verge – Rafter clamp.

New! Made of aluminium!

Rafter clamp – Aluminium

The Tobler rafter clamp made of aluminium is extremely light which means it can be installed quickly, securely and easily by just one person. You can put the rafter tie in the right position in an instant, for more efficient use of your time.

Article no.	Length	Width	Clamping width	Weight
Z-611080	70 cm	15 cm	0 – 27 cm	6.8 kg







Z-611080

Benefits


- aluminium for light weight: only 6.8 kg
- Can be assembled by just one person
- Easy pre-positioning using locking pins
- End positioning using an impact wrench or scaffolding ratchet (spanner size 22 mm)
- Clamping width 0 – 27 cm



Screw clamp – Steel

- Galvanized steel screw clamp (Thickness 3 mm), incl. integrated mounting ratchet


Article no.	Length	Width	Weight
Z-611060	60 cm	15 cm	10,30 kg
Z-611070	70 cm	15 cm	12,60 kg

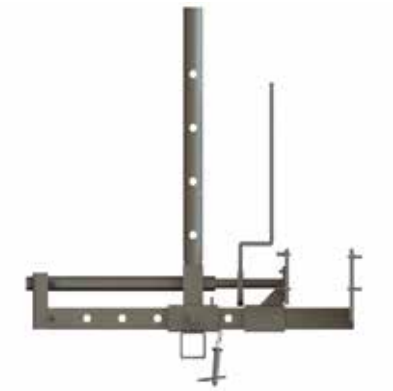

Z-611070

- Standard bracket for screw clamp for purlin assembly – world's only screw clamp that can also be used

Article no.	Length	Width	Weight
Z-611072	60 cm	5 cm	3,70 kg



Z-611072

MATO Pro Anti-fall protection systems

Verge Anti-fall protection.

New!

Anti-fall protection for verge

Applicable to any roof structure, the antiAnti-fall protection system for verge enables quick and effective guardrail attachment. This eliminates the need for scaffolding.

The verge Anti-fall protection system is the ideal complement for securing Anti-fall protection guardrails to rafter clamps. It greatly simplifies installation on pitched roofs, as only two roof tiles need to be removed.



Z-625020



Z-625040

- Steel
- Tube Ø 38 mm

Article no.	Length	Width	Height	Weight	for roof batten heights
Z-625020	20 cm	19.5 cm	19.5 cm	1.60 kg	up to 30 mm
Z-625040	20 cm	19.5 cm	19.5 cm	1.70 kg	up to 40 mm

Grommet

- for quick and safe sealing of pipe perforations for items Z-625020 and Z-625040
- Waterproof
- Diameter Ø 42 mm
- Packaging unit: carton of 10 pièces

Article no.	Length	Width	Height	Weight
Z-625030	100 cm	40 cm	4 cm	165 g



Z-625030





Verge antiAnti-fall protection with grommet.

MATO Pro Anti-fall protection systems

Stationary roof edge guardrail support.


New!

Stationary roof edge guardrail support

Designed as a temporary Anti-fall protection system for construction and maintenance work on flat roofs, the roof edge guardrail Anti-fall protection not only provides maximum safety but also offers a permanently integrated solution for flexible and on-demand use.

- Stationary roof edge flashing

Article no.	Length	Width	Weight
Z-650010	26 cm	10 cm	0.40 kg

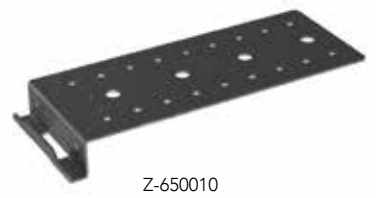

Z-650010

- Stationary roof edge support

Article no.	Length	Width	Weight
Z-650050	76 cm	6 cm	5.20 kg




Z-650050

- Aluminium guard rail standard
- With half coupling

Article no.	Length	Weight
Z-650100	170 cm	4.20 kg



Z-650100

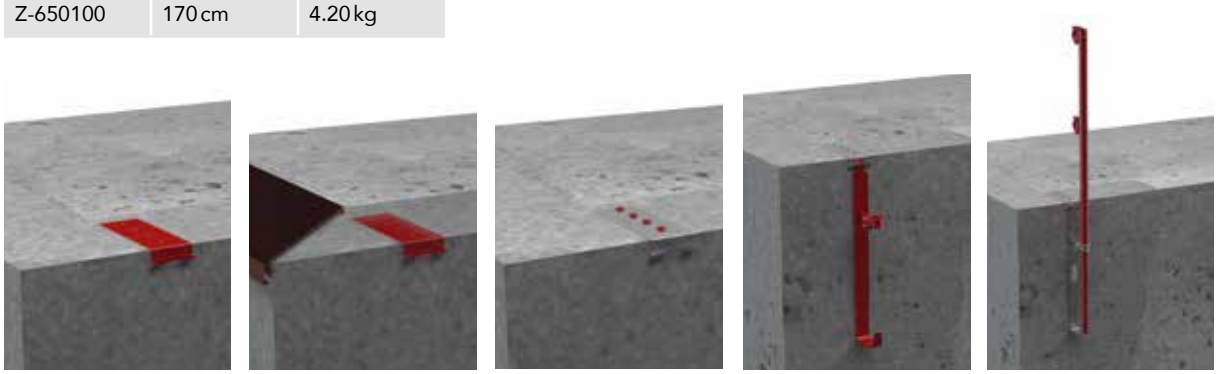

The roof edge flashings are screwed onto the parapet at a maximum spacing of 3 meters and are no longer visible after installation, hidden beneath the parapet flashings. The roof edge bracket can be easily inserted.

The guard rail standard is mounted and secured onto it. After use, everything is removed again – only the barely visible roof edge flashing remains permanently installed and can be reused at any time.



MATO Pro **Anti-fall protection systems**

Guardrail standard.

Guardrail standard

- Height-adjustable
- Aluminium with two wedge couplings

Article no.	Length	Weight	Thickness
Z-613110	110 cm	3.6 kg	4 mm



Z-613110

- Aluminium with two screw couplings

Article no.	Length	Weight	Thickness
Z-614110	110 cm	2.6 kg	4 mm




Z-614110

Anti-fall protection guardrails

- Made of aluminium
- Thickness 4 mm

Article no.	Length	Width	Weight
Z-565100	100 cm	50 cm	4.2 kg
Z-565200	200 cm	50 cm	6.9 kg
Z-565400	400 cm	50 cm	13.0 kg
Z-565500	500 cm	50 cm	16.0 kg
Z-565600	600 cm	50 cm	19.5 kg
Z-565800	800 cm	50 cm	25.6 kg

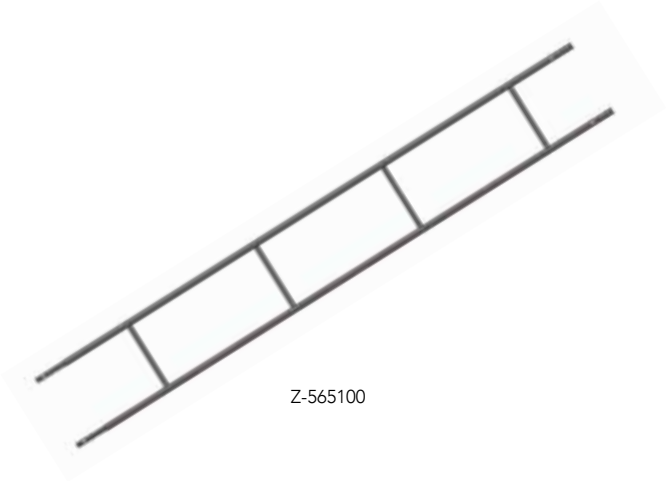
Z-565100

Roof scaffolding ladder

- Ladder aluminium

Article no.	Length	Weight
Z-575210	210 cm	7.7 kg
Z-575310	310 cm	8.0 kg
Z-575610	610 cm	16.0 kg


Z-575210 – Z-575610

- Ridge suspension for roof scaffolding ladder

Article no.	Weight
Z-575050	8.25 kg


Z-575050

- Wooden support for roof scaffolding ladder

Article no.	Weight
Z-575042	3.5 kg


Z-575042

Important:
The wooden supports must be fitted at least every 1,50 m.

MATO Pro Anti-fall protection systems

Protection on roof ridge and gable.

Console bracket for ridge guardrails

Tobler's console bracket for ridge protection is easy, safe and adjustable. It offers perfect protection against falling near the ridge of the roof. Thanks to its astonishingly low weight, assembly and disassembly of the bracket takes very little time. The stable anchor hook is mounted under the roof tiles, which simply need to be raised slightly for the purpose.

Article no.	Length	Height	Adjustable	Weight
Z-620150	160 cm	100 cm	0–30°	7.8 kg



Z-620150







Hooking the console bracket under the roof tiles.

Position of cross tube

Benefits

- Aluminium for light weight: only 7.8 kg
- Easy to assemble
- Adjustable from 0–30°
- Solar panels can be mounted all the way up to the ridge
- Anti-fall protection where you need it
- No need for full scaffolding
- No need to remove the roof tiles
- Guard rail standards with fast-locking couplings
- Can be used on all tiled roofs with an incline of up to 45°
- Reliable, mobile side protection system in accordance with EN 13374, Class A

Anchor hook for ridge protection

This special anchor hook is used if the standard anchor hook cannot be used. It is screwed into the rafters.

Article no.	Weight
Z-620010	0.7 kg




Z-620010

MATO Pro Anti-fall protection systems

Protection on roof ridge and gable.

Gable edge safety system


Building on the Tobler rafter clamps, guardrail standards with half-couplings are used to attach the upper and lower scaffolding tubes to the gable guardrail. The guard rail standards are secured in place using pins or screws.

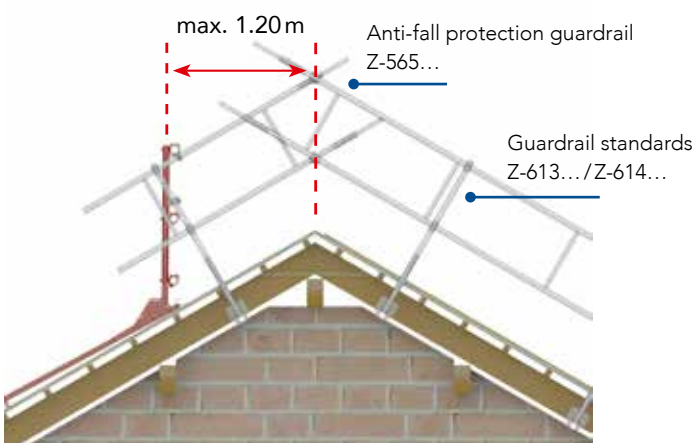


Toe board for ridge protection

- Made of aluminium

Article no.	Length	Height	Weight
Z-620015	300 cm	15 cm	5.0 kg

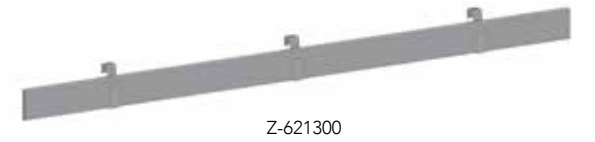


Z-621300

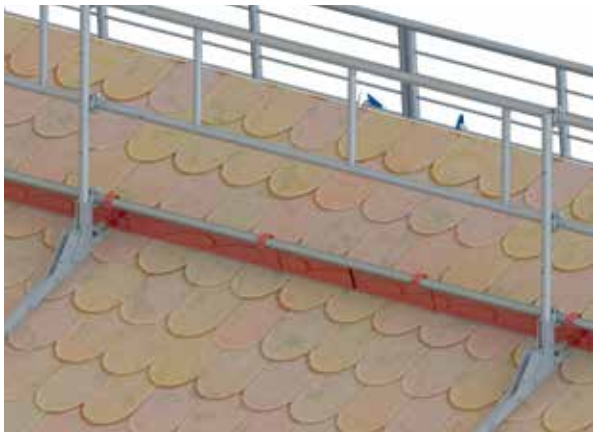

Scaffolding tube

- Made of aluminium
- Diameter: 48.3 mm × 4.00 mm

Article no.	Length	Weight
Z-190050	50 cm	0.7 kg
Z-190100	100 cm	1.4 kg
Z-190150	150 cm	2.1 kg
Z-190200	200 cm	2.8 kg
Z-190250	250 cm	3.6 kg
Z-190300	300 cm	4.3 kg
Z-190350	350 cm	5.0 kg
Z-190400	400 cm	5.7 kg
Z-190450	450 cm	6.4 kg
Z-190500	500 cm	7.1 kg
Z-190600	600 cm	9.0 kg
Z-190800	800 cm	12.0 kg

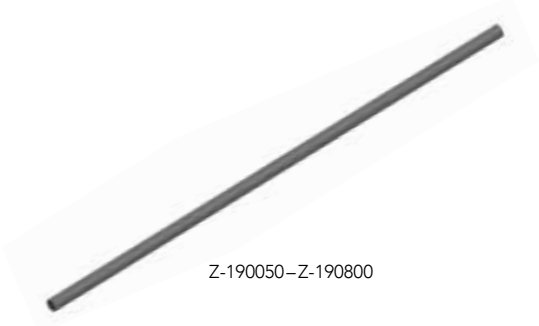

Z-190050 – Z-190800


MATO Pro **Anti-fall protection systems**

Additional brackets for the roof.

Roof scaffolding console bracket

- Made of aluminium
- Can be precisely adapted to every roof slope angle greater than 15° – highly flexible height adjustment
- Suitable for 1 wide and 1 narrow standard deck with round-tube support next to each other
- Load: 500 kg / bracket

Article no.	Length	Weight
Z-612090	90 cm	11.8 kg

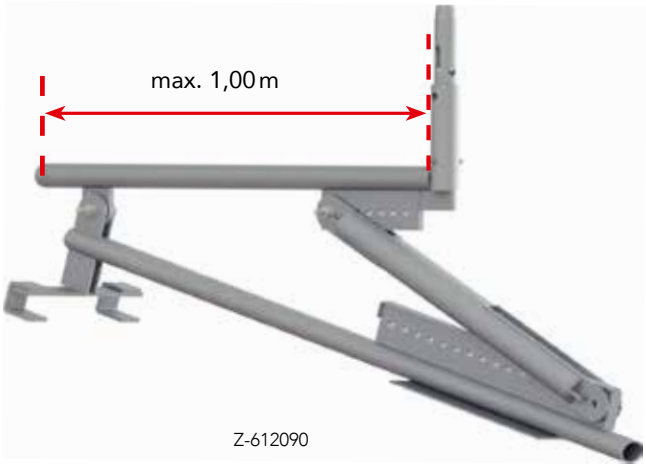

Z-612090



- Push-on spigot with coupling, compatible with MATO 1, 2 and 8, as well as, the roof scaffolding console

Article no.	Length	Weight
Z-612091	25 cm	1.8 kg



Z-612091

Solar console bracket

- Steel
- For up to 34 cm-wide platforms with round-tube support
- Adjustable to roof slope angles between 20°–45°

Article no.	Width	Tube Ø	Weight	Type
Z-612030	30 cm	57 mm	4.8 kg	MATO Z
Z-612031	30 cm	48.3 mm	4.4 kg	MATO 1



Z-612030

- Additional support for solar console bracket

Article no.	Length	Weight
Z-612035	29 cm	1.2 kg



Z-612035



Solar console bracket completely assembeled

MATO Pro Anti-fall protection systems

Working safely on the roof eaves.

Temporary roof edge protection

The MATO bracket solution for eaves meets standard EN 13374.
It is based on the diagonal distribution of forces through bracing on the building facade and is the ideal solution for widely protruding roofs.

In most cases, no roof tiles have to be removed, which will save a lot of costly assembly time. The comprehensive instruction for assembly and use outline the special solutions that are possible.



Article no.	Designation	Total qty
Z-611040S	Guardrailing SET for eaves (bracket for eaves, mesh guards, guardrail standards – 11 units for 20 running metres)	11
Z-611240	Mesh guard, 240 × 100 cm	8
Z-565500	Guardrail, 500 × 50 cm	4
Z-611043	Spacer	16

Article no.	Designation	Weight
Z-611040	Eaves bracket	5.6 kg
Z-611041	Inclined support	5.4 kg
Z-611042	Guardrail standards	6.7 kg
Z-611043	Spacer soffit panel	0.4 kg
Z-611044	Fuse for the eaves bracket	0.6 kg
Z-542248	Swivel coupler 48/48	1.5 kg
Z-528013	Locking pin	0.22 kg
1-510250	Toe board wood	3.4 kg
1-510300	Toe board wood	4.9 kg

Benefits

- Ideal solution for widely protruding roofs
- Fast assembly



Mesh guards for the eaves

- Aluminium mesh
- Refer to assembly instructions

Article no.	Length	Width	Weight
Z-611120	120 cm	100 cm	7.1 kg
Z-611240	240 cm	100 cm	15.9 kg



Z-611120

- Complete steel bracket for soffit mesh
- Adjustable


Article no.	Length	Weight
Z-611242	100 cm	11.5 kg



Z-611242

- Connecting standards for soffit mesh
- Ø 48.3 mm thick connection to gable

Article-no.	Length	Weight
Z-611100	123 cm	2.10 kg



Z-611100





Bolts and spring cotter pins

Article no.	Designation	Weight
Z-833001	Bolt Ø 10 × 60 mm	0.04 kg
Z-833002	Bolt Ø 10 × 80 mm	0.05 kg
Z-834001	Bolt Ø 12 × 60 mm	0.07 kg
Z-834002	Bolt Ø 12 × 80 mm	0.08 kg
Z-850001	Spring cotter pin	0.02 kg



Z-834002



Z-850001


MATO Pro Anti-fall protection systems

Parapet clamp.

New! Made of aluminium !

Parapet clamp – Aluminium

Work on flat and concrete roofs and parapets: you can cover virtually all types of application with a single Tobler parapet clamp.

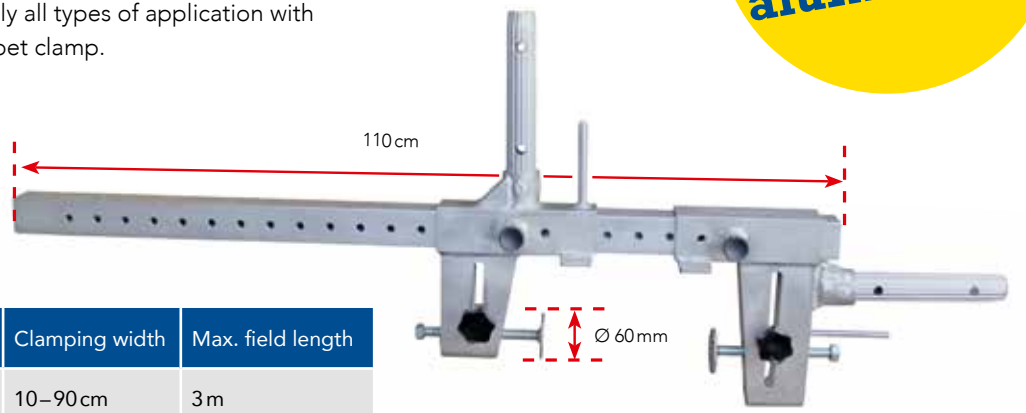

Z-611095


Article no.	Weight	Clamping width	Max. field length
Z-611095	7.5 kg	10 – 90 cm	3 m

Benefits

- Aluminium for light weight: only 7.5 kg
- Wide clamping width 10 – 90 cm
- Can be assembled by just one person
- Extremely fast to pre-position and secure in place using locking pins, as well as to tighten using impact wrench or scaffolding ratchet
- Maximum flexibility due to height-adjustable clamping plates
- Integrated toe board holder
- Can be used when working on flat roofs, concrete roofs and parapets
- Protection class A according to EN 13374
- Compatible Tobler lattice box

Parapet clamp – Steel

- Can be used for concrete roofs / attics and flat roofs
- Convenient securing of the parapet clamp with threaded rod and toggle nut

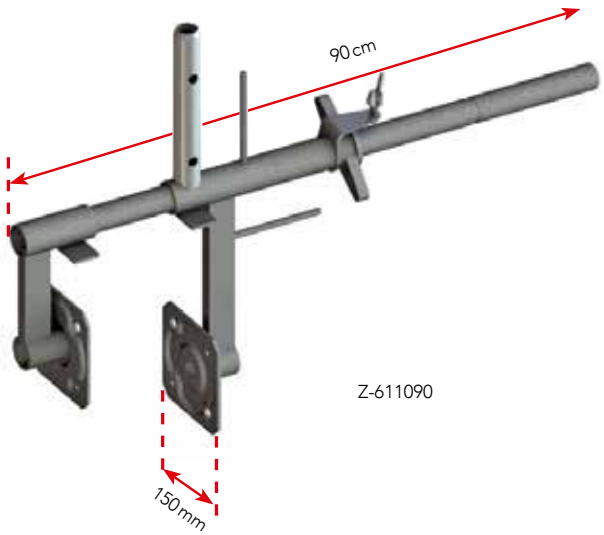

Z-611090

Article no.	Weight	Clampin width	Max. field length
Z-611090	10.3 kg	8 – 36 cm	4 m

MATO Pro Anti-fall protection systems

Parapet clamp.

Variant 1 – Parapet



Variant 2 – Concrete roof



Important:

The maximum distance between the parapet clamps is:

- 4 m when a Anti-fall protection system from Tobler is used and all guardrails are being connected
- 3 m for a single field

The maximum permissible distance between the lower railing rail and toe board of 47 cm must not be exceeded

- If the maximum permissible vertical distance is exceeded, a third row of guardrail tubes with screw couplings must be attached to the guardrail standards (Z-614110).

MATO Pro **Anti-fall protection systems**

Flat roof guardrail All-in-One.

New!

Flat roof guardrail «All-in-One»

The innovative flat roof guardrail was developed for use in confined spaces. With a minimal installation width of only 60 cm between the roof edge and the solar console, the foldable flat roof guardrail can be easily installed – without compromising on the highest safety standards. The guard rail standards are screwed to the parapet at a maximum spacing of 3 meters. After use, it can be folded down to save space and is ready for use again at any time.



Z-630100

- Flat roof guardrail "All-in-One" set consisting of: guard rail standards, flat roof guardrail crossbeam, ballast base mount, rear insert including locking pin *(without ballast base mount TL K1)*
- Made of steel

Article no.	Length telescopic	Height	Weight
Z-630100	58 – 134 cm	110 cm	19.00 kg

Benefits


- Ideal for use in extremely tight spaces with only 60 cm between the roof edge and the solar console
- 1 product, 3 different variants
- Rapid installation and removal
- Space-saving storage – without loss of components thanks to integrated locking pins
- Also suitable for permanent installation and easily foldable – reusable at any time

One product – three variants:

Variant 1: With a 135 cm outreach and one ballast base

Variant 2: With a 60 cm outreach and two ballast base


Variant 3: With a 60 cm outreach, fixed mounted on the parapet

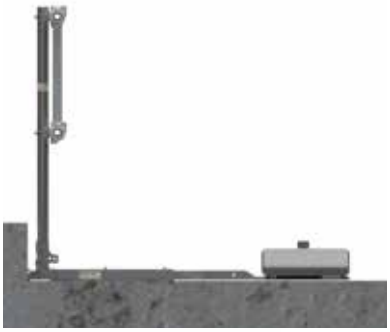

Variant 1



Variant 2

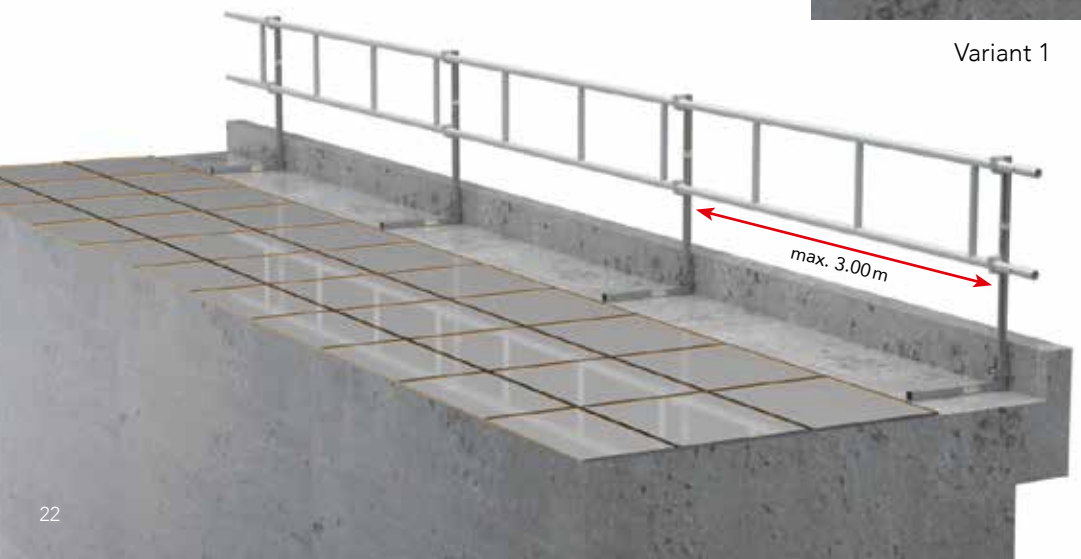

Variant 3

MATO Pro Anti-fall protection systems

Flat roof guardrail All-in-One.

Guard rail standard aluminium

- With quicke-release coupling

Article no.	Height	Weight
Z-630110	110 cm	6.00 kg



Z-630110

Crossbeam for flat roof guardrail

- Made of steel

Article no.	Length	Weight
Z-630050	58 cm	3.50 kg



Z-630050

Rear slot

- For flat roof guardrail «All-in-One»

Article no.	Length	Weight
Z-630010	70 cm	2.40 kg



Z-630010

Ballast base mount

- Made of steel
- For flat roof guardrail «All-in-One»

Article no.	Weight
Z-630005	0.90 kg



Z-630005

Retaining plate

- For flat roof guardrail «All-in-One»

Article no.	Weight
Z-630020	6.40 kg



Z-630020

Ballast base TL K1

Article no.	Weight
B-310028	25.00 kg



B-310028





MATO Pro **Anti-fall protection systems**

Console brackets for flat roof guardrailing.


Flat roof guardrail

Our engineers have created a way for you to bridge a distance of 4 m with a counterweight of just 25 kg.

The Anti-fall protection for working on a flat roof guarantees maximum flexibility and can be adapted to all roof shapes.

- Set includes guard rail standards
- Adjustable height and depth

Article no.	Length	Width	Weight
Z-610050S	150 cm	5 cm	10.0 kg

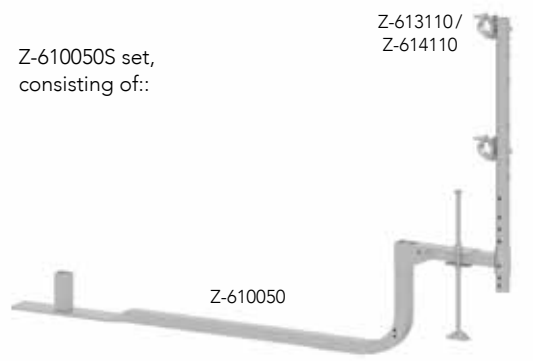

Benefits

- Only 4 basic components
- Counterweight of only 25 kg
- Very fast assembly and disassembly
- Can be folded out/folded back together in just 2 steps
- Flat roof guardrail distance up to 4 m
- Up to 8 m of unrestricted working on the roof
- Easy to move


Ballast base TL K1

Article no.	Weight
B-310028	23.75 kg


Z-310028

Beam coupling


Article no.	Weight
Z-549248	3.1 kg


Z-549248

Auxiliary wheel for flat roof console bracket

Article no.	Weight
Z-610051	1.3 kg


Z-610051

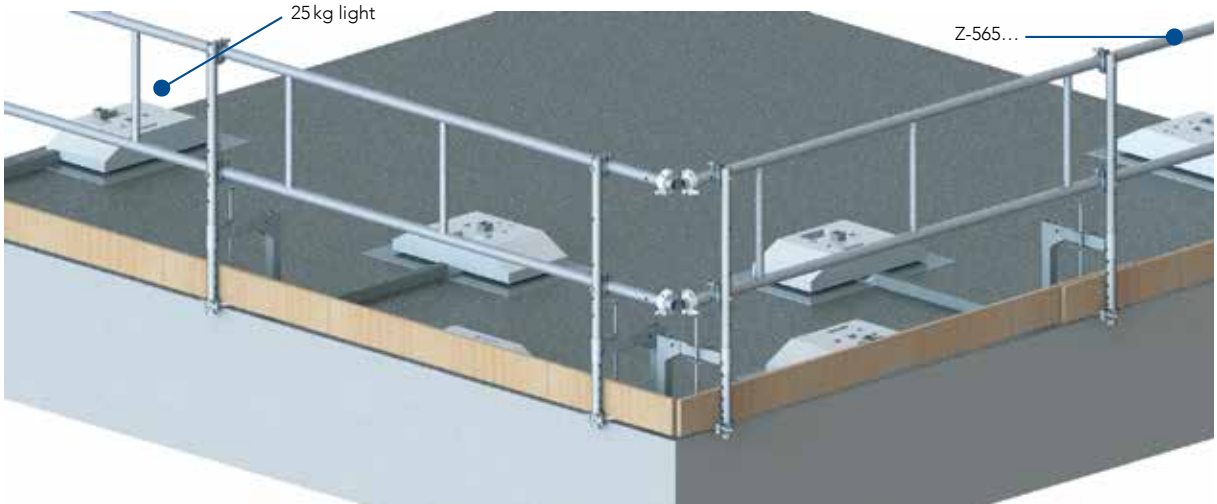


MATO Pro Anti-fall protection systems

Console brackets for flat roof guardrailing.

Flat roof guardrail bracket


Flat roof guardrail brackets, together with coupled standards brackets, are mounted at a distance of 2 to 3.2 m, depending on the brickwork. Only scaffolding tubes with a diameter of 48.3 mm or aluminium beams may be used as guard rails.

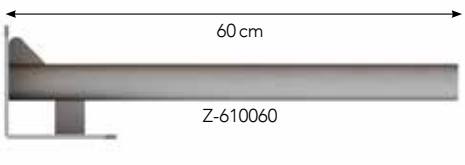

- Made of galvanised steel

Article no.	Length	Bracket width	Weight
Z-610040	27 cm	15 × 15 cm	2.5 kg
Z-610060	60 cm	15 × 15 cm	4.2 kg


Variant 1 – Parapet **Variant 2 – Concrete roof**

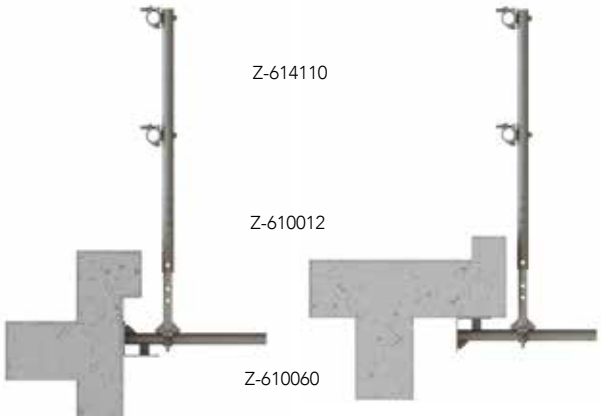

Standards brackets

- Tube-Ø 38 mm


Article no.	Length	Weight
Z-610012 with wedge coupling, adjustable	60 cm	2.5 kg
Z-610013 with screw coupling, adjustable	60 cm	2.1 kg
Z-610014 with wedge coupling, non-adjustable	30 cm	2.5 kg

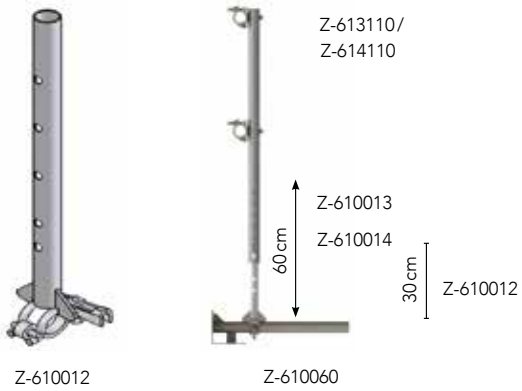

Flat roof bracket for metal façade

- Made of solid aluminium
- Tube Ø 48.3 mm
- Slot width 15 mm

Article no.	Length	Width	Height	Weight
Z-610020	80 cm	25 cm	50 cm	3.70 kg

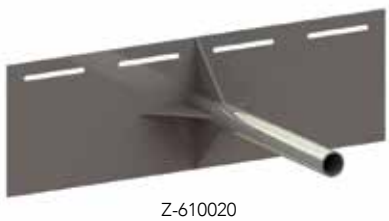

MATO Pro Anti-fall protection systems

Roof walkway protection.

A wide range of walkway panels for compatible systems is also available

Mesh panels for edge protection

- Made of aluminium
- With integrated toe board function

MATO 1

Article no.	Length	Weight
1-134070	70 cm	4,90 kg
1-134100	100 cm	6,50 kg
*1-134125	125 cm	8,00 kg
1-134150	150 cm	9,40 kg
1-134200	200 cm	13,10 kg
1-134250	250 cm	16,00 kg
1-134300	300 cm	19,80 kg

- Front mesh panel

Article no.	Length	Weight
1-133070	70 cm	5,20 kg

MATO 2

Article no.	Length	Weight
2-134065	65 cm	4,30 kg
2-134100	100 cm	6,20 kg
*2-134125	125 cm	7,50 kg
2-134150	150 cm	8,60 kg
2-134200	200 cm	12,40 kg
2-134250	250 cm	15,10 kg
2-134300	300 cm	18,00 kg

MATO 3


- Powder coating upon request

Article no.	Length	Height	Weight
3-134075	75 cm	100 cm	5,0 kg
3-134100	100 cm	100 cm	6,3 kg
3-134125	125 cm	100 cm	7,7 kg
3-134150	150 cm	100 cm	9,1 kg
3-134175	175 cm	100 cm	10,4 kg
3-134200	200 cm	100 cm	12,5 kg
3-134225	225 cm	100 cm	14,0 kg
3-134250	250 cm	100 cm	15,4 kg
3-134300	300 cm	100 cm	18,8 kg

* Delivery time: about 6 weeks

Benefits


- Very fast and simple assembly without nets
- Maximum safety according to Swiss provisions
- Made of high-quality aluminium
- Powder coating upon request

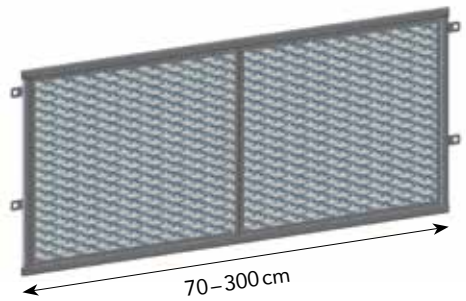

1-134200



1-133070

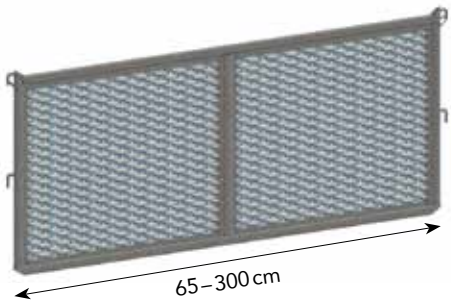

2-134200



3-134075 – 3-134300


MATO S Safety accessories

Roof walkway protection.

Roof walkway net type 200 T

Our safety net made of heavy-duty polyethylene is not only the fastest and therefore the most efficient solution on the market, it also guarantees tested safety. No tubes are required above the toe boards for the assembly.

Our walkway net has passed the dynamic test **SN EN 13374**

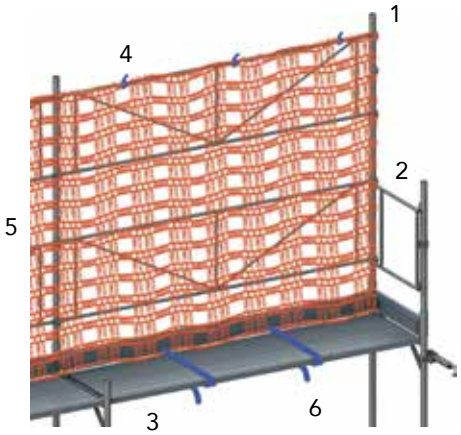

1 Guardrail standard
2 End guardrail
3 Toe board
4 Net attachment
5 Walkway net
6 Strap

Roof walkway net

Article no.	Dimensions	Weight
S-735008	2 × 8 m	3.4 kg
S-735013	2 × 13 m	5.5 kg
S-735025	2 × 25 m	12.4 kg



Strap tie

- 3 units required per rail

Article no.	Length
S-750030	35 cm



- For walkway net

Article no.	Length
S-750160	160 cm



S-750030

Roof access

Alternatives from our product range.

MATO R Profi **Rolling scaffolding**

- The high-end aluminium scaffolding
- Comfortable width 150 cm
- Variable length
- Leading assembly
- Column-free in every position
- Extendable to any side
- Compatible with MATO 3 and MATO 8 Modular scaffolding
- Assembly with frame and upright variants possible



MATO R Pro **Rolling scaffolding**

- Width 70 cm or 135 cm
- Lengths 190 cm, 250 cm and 305 cm
- Extreme stability thanks to folding structural frame
- Plug-in system – can be assembled without tools
- Closed work surface thanks to hatch cover
- Maximum safety, certified according to EN 1001 2005/EN 1298 1996



MATO R Eco **Rolling scaffolding**

- The most economical rolling scaffolding from the Tobler Group
- Width 75 cm and 150 cm
- Bay length 250 cm
- Extremely light
- Plug-in system – can be assembled without tools
- Closed work surface thanks to hatch covering
- Lightweight plywood decking



Mission statement

Efficiency. Flexibility. Security.



Mission statement

Together we implement solutions that are centred around the customer and their success.

We support you as a reliable partner for all matters relating to scaffolding and formwork assembly, and develop customer-specific solutions – from planning through engineering to production.

As an innovative full-service provider, we think ahead. We carry our philosophy of efficient, flexible and safe construction further into the industry.

With our products you can rely on excellent functionality and the highest production quality.

Swiss Engineering.
Swiss Technology.




MATO 2 Stair tower

- Maximum safety EN 12810/12811
- DIBt – Certification No. Z-8.1-937
- Weight and handling advantages during transportation and storage
- Modularity: connections in four spatial directions
- Quick assembly

MATO Scaffoldings

Efficiency. Flexibility. Safety.

Facade scaffoldings	**MATO** 1 **MATO** 2	**MATO** 53 CK **MATO** 54 Lay **MATO** 62 Ple **MATO** 65 Hün compatible with your existing scaffolding	
All-in-one scaffolding system	**MATO** 3 **MATO** 8	**MATO** Connect Road Bridge **MATO** Connect Bridge Beam	
Roof systems	**MATO** Pro	**MATO** Pro Anti-fall protection **MATO** Pro Temporary roof systems **MATO** Pro Walkway roofing	
Mobile scaffoldings	**MATO** R	**MATO** R Profi **MATO** R Pro **MATO** R One Man Tower **MATO** R Eco	
Work scaffolding on construction sites	**MATO** T	**MATO** T Stair towers **MATO** T Cable bridges **MATO** T Ramps for site access **MATO** T Scaffoldings for Concreting and Reinforcement	
Events	**MATO** E	**MATO** E Stages & Tribunes **MATO** E Event-Service / Support **MATO** E R & D	
Accessories	**MATO** Z	**MATO** Z Scaffolding accessories **MATO** S Safety accessories **MATO** B Construction devices **Tobler** Logistics	
Storage solutions	**Tobler** Storage	**Tobler** Cantilever Shelving **Tobler** Pallet Shelving **Tobler** Floor Special Shelving **Tobler** Lattice boxes / Steel boxes **Tobler** Pallets and Racks	
Services	**Tobler** Services	R & D / Static calculations / CAD / Trainings / Customer solutions / Customized Solutions / Finance and Consulting Second hand / Trade-in old for new	

Tobler Formwork

The joy of industrial construction.

Wall formwork	**Tobler** Wall	**Tobler** Top **Tobler** Manu Master Pro (Ringer) Master steel / alu (Ringer) System 2000 steel / alu (Ringer)	
Slab formwork	**Tobler** Sky	**Tobler** Deck **Tobler** Desk Slab Table / Kart **Tobler** Flex AluDEK (Ringer) DEKplus Slab Table (Ringer)	
Individual formwork	**Tobler** I	**Tobler** Rex Girder wall formwork **Tobler** Varia Circular formwork **Tobler** Project Special formwork	
Shoring systems	**Tobler** H	**Tobler** Tower Heavy-Duty Props **Tobler** T22 Load-bearing system	
Work scaffolding on construction sites	**MATO** T	**MATO** T Reinforcement scaffolding **MATO** T Ramps for site access, **MATO** T Towers / Cable bridges **MATO** R Pro / Eco **MATO** R One Man Tower	
Engineering	**Tobler** Kit	**MATO** 3 **MATO** 8 **MATO** Connect Road Bridge **MATO** Connect Bridge Beam	
Accessories	**Tobler** Accessories	**Tobler** Formwork accessories **Tobler** Construction devices **Tobler** Logistics **Tobler** Storage solutions	
Services	**Tobler** Services	**Tobler** Rent **Tobler** ForU **Tobler** Care **Tobler** Revalued	
Digital services	**my Tobler**	**Tobler** Formwork planner **Tobler** Engineering	

Tobler

First-class customer service.

At home in Switzerland – anchored in Europe

We are developing the internationalisation of our product range.



Order & advice

sales@tobler-ag.com
+41 71 886 06 06

Order online

Copyright 2024 Tobler AG / 02.2026

« With MATO Pro Anti-fall protection, you benefit from our core expertise in aluminium. Fewer and lighter componentmean significantly shorter assembly time – saving you money every day. »



Martin Tobler
CEO

Tobler AG | Langenhagstrasse 48–52 | CH-9424 Rheineck | info@tobler-ag.com
www.tobler-ag.com

Tobler®